

LI-ION Range POWERED SHEAR WRENCH CATALOGUE.

For TCB Assemblies

ALLFASTENERS
.COM.AU



Models	Tool Shapes	Power Types	Socket Type	Adaptable TC Bolts by diameters							
				M12	M16	M20	M22	M24	M27	M30	M36
CSM160	Pistol	Battery	M	•	•						
CSM200	Pistol	Battery	M		•	•					
CSM220	Pistol	Battery	M		•	•	•				
CSH240	Pistol	Battery	H		•	•	•	•			
CSV300	Pistol	Battery	V					•	•	•	


CSM160 – Cordless Shear Wrench



Includes:

x1 HIKOKI 18V/36V Multivolt
4.0/8.0Ah Lithium Battery
BSL36B18


x1 HIKOKI 18V Battery
Charger UC18YSL3

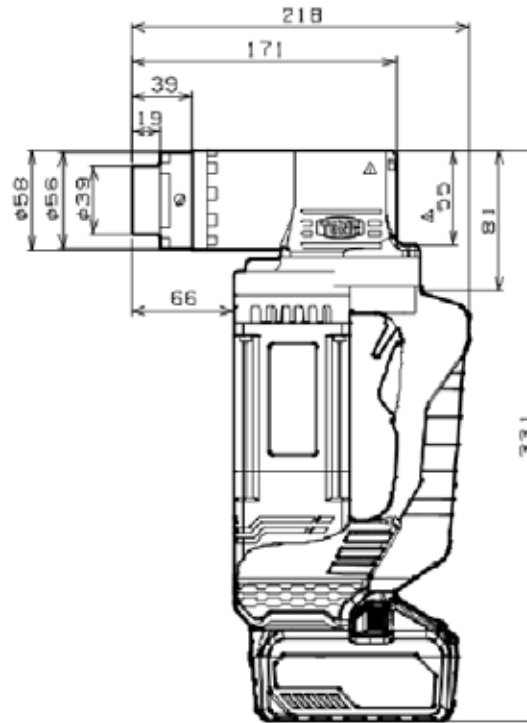

Model	Max Torque (N•m)	Adaptable TC bolts dia.	Free Speed (r.p.m.)	Bolting times at full battery charge	Weight (kg)	Protection Class
CSM160	300	M12, M16	25	400	4.6 ※	Double Insulated

※ without socket, with battery

CSM200 – Cordless Shear Wrench

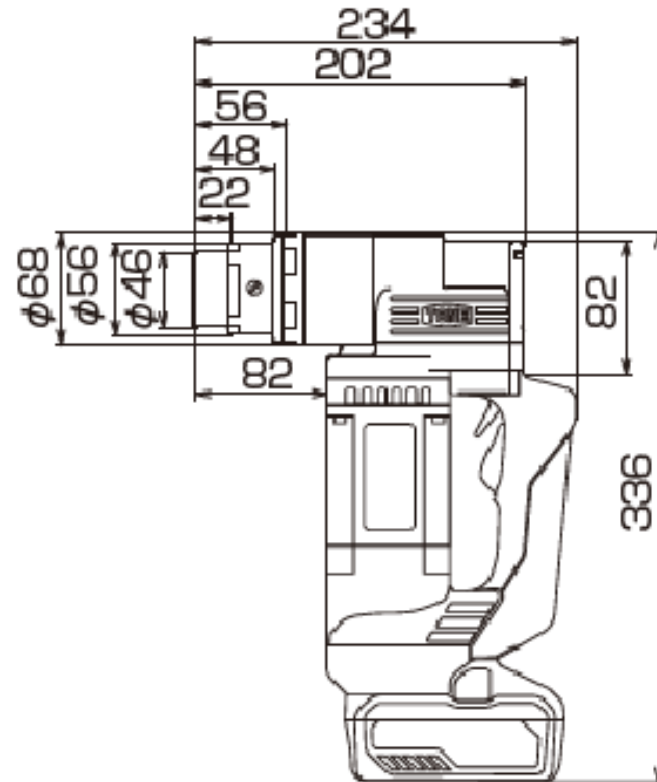

Includes:


x1 HIKOKI 18V/36V Multivolt
4.0/8.0Ah Lithium Battery
BSL36B18

x1 HIKOKI 18V Battery
Charger UC18YSL3

Model	Max Torque (N•m)	Adaptable TC bolts dia.	Free Speed (r.p.m.)	Bolting times at full battery charge	Weight (kg)	Protection Class
CSM200	500	M16, M20	22	250	5.1 ✕	Double Insulated

✕ without socket, with battery

CSM220 – Cordless Shear Wrench

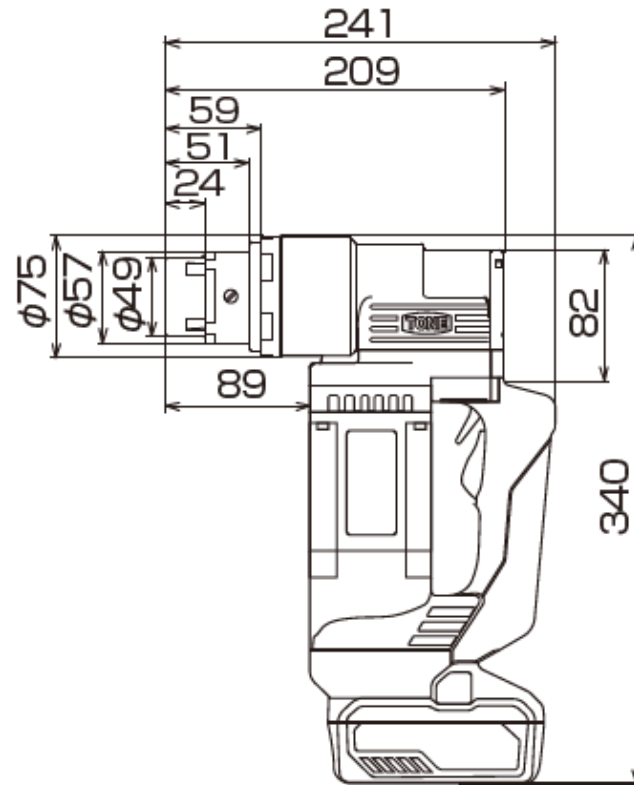

Includes:


x1 HIKOKI 18V/36V Multivolt
4.0/8.0Ah Lithium Battery
BSL36B18

x1 HIKOKI 18V Battery
Charger UC18YSL3

Model	Max Torque (N·m)	Adaptable TC bolts dia.	Free Speed (r.p.m.)	Bolting times at full battery charge	Weight (kg)	Protection Class
CSM220	800	M16, M20, M22	17	200	4.5 ※	Double Insulated

※ without socket, with battery

CSH240 – Cordless Shear Wrench

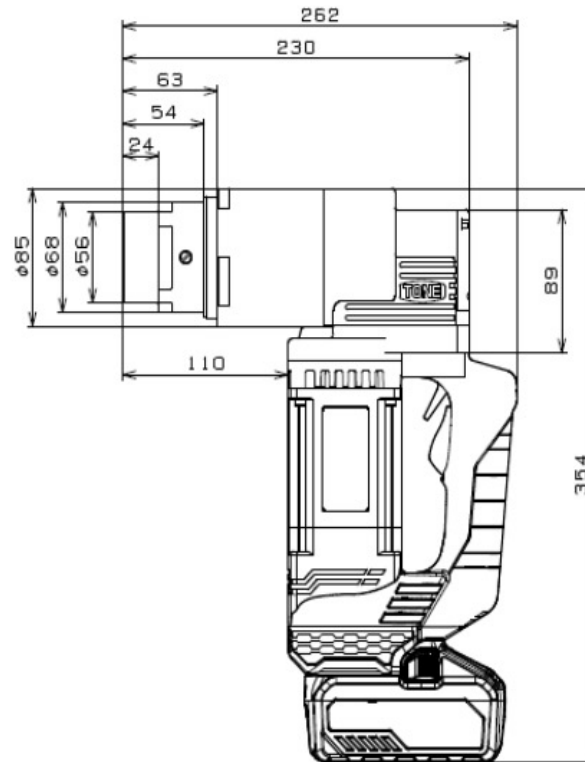

Includes:


x1 HIKOKI 18V/36V Multivolt
4.0/8.0Ah Lithium Battery
BSL36B18

x1 HIKOKI 18V Battery
Charger UC18YSL3

Model	Max Torque (N·m)	Adaptable TC bolts dia.	Free Speed (r.p.m.)	Bolting times at full battery charge	Weight (kg)	Protection Class
CSH240	1200	M16, M20, M22, M24	8	180	5.9 ✕	Double Insulated

✕ without socket, with battery

CSV300 – Cordless Shear Wrench

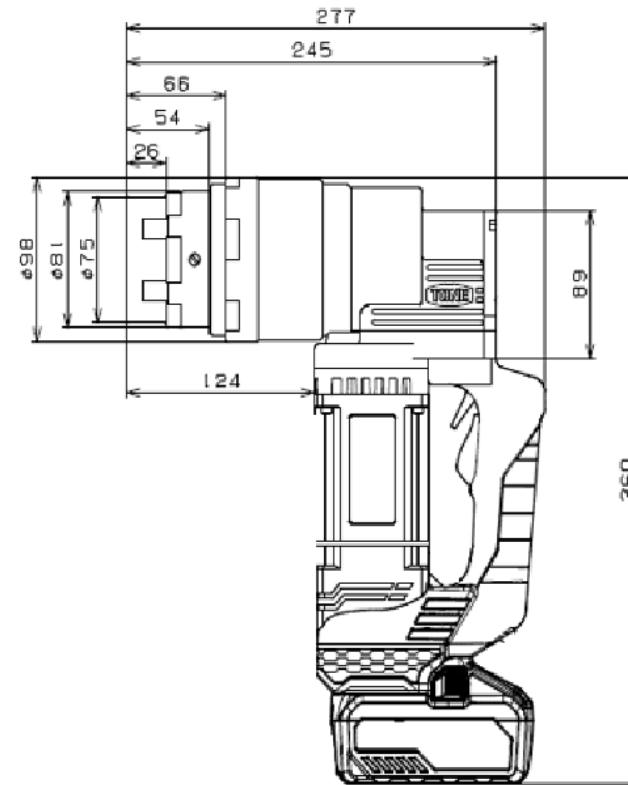

Includes:

x2 HIKOKI 18V/36V Multivolt
4.0/8.0Ah Lithium Battery
BSL36B18

x1 HIKOKI 18V Battery
Charger UC18YSL3

Model	Max Torque (N•m)	Adaptable TC bolts dia.	Free Speed (r.p.m.)	Bolting times at full battery charge	Weight (kg)	Protection Class
CSV300	2100	M24, M27, M30	4	70	7.5 ✖	Double Insulated

✖ without socket, with battery