

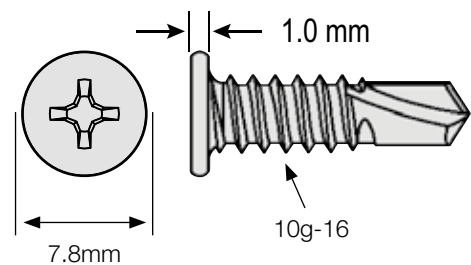
**FLUSH TOP SELF DRILLING SCREWS**

ZINC YELLOW / CLASS 3 MECH GALVANISED

These **flush top head** screws are designed to eliminate bulging underneath plasterboard. Suitable for light gauge steel connections with the self-drilling screw point. They will provide the best possible clamping of material up to 3mm thick.

**TECHNICAL**

- 10 gauge / 16 threads per inch
- Flat top head
- Phillips drive no.2
- Self drilling point no.3
- Drill capacity: 1.5 - 3.0 mm combined material
- Heat treated carbon steel.
- Coating in electroplated zinc yellow and/or class 3 mechanical galvanized. **Class 4 mechanical galvanized available upon request, moq applies.**

**PERFORMANCE**

MECHANICAL PROPERTIES			
Screw	Single Shear (N)	Axial Tensile (N)	Torsional Strength (Nm)
10g-16	5600	11900	8.3

PULL OUT DATA (kN) G450 Steel					
Screw	1.0mm G450 Steel	1.2mm G450 Steel	1.5mm G450 Steel	1.9mm G450 Steel	2.4mm G450 Steel
10g-16	2.8	3.5	4.3	5.8	8.3

Appropriate safety factors should be applied for design purposes.