

PROLOK RESYTORK COUNTERSUNK SD SCREW

DELTA PROTEKT® GALVANISED

SKU: 7RTCS D


Self drilling screws manufactured with a Resytork 6-Lobe Pin drive. Drilling tips provide fast and easy application eliminating the need to pre-drill. Installed and removed using 6-Lobe Pin tooling.

- **Drill Capacity:** 8g (2mm), 10g (4mm), 12g (5mm)
- **Driver Type:** Resytork Drive 6-Lobe Pin 2 Way
- **Installation Speed:** 1800 - 2500 RPM max drill speed
Drill Drivers is suitable
Impact Drivers are not recommended.



PHYSICAL CHARACTERISTICS

- **Head Type:** Countersunk
- **Point Type:** No.3 Self Drilling Point
- **Material:** Carbon Steel C1022
- **Finish:** Delta Protekt® Galvanised

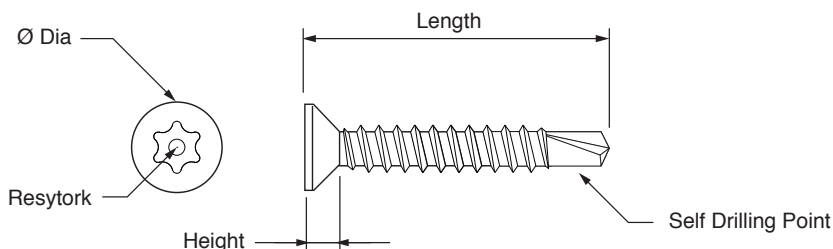

SKU	Gauge x Length	Driver Type	Head Dia	Head Height	Drill Capacity	
7RTCS D8D-G	8g-14 x 1/2	T20	7.9mm	3.0mm	2mm	100
7RTCS D8G-G	8g-14 x 1	T20	7.9mm	3.0mm	2mm	100
7RTCS D10F-G	10g-14 x 3/4	T25	9.3mm	3.2mm	2mm	100
7RTCS D10G-G	10g-14 x 1	T25	9.3mm	3.2mm	4mm	100
7RTCS D10I-G	10g-14 x 1 1/2	T25	9.3mm	3.2mm	4mm	100
7RTCS D10J-G	10g-14 x 2	T25	9.3mm	3.2mm	4mm	100
7RTCS D12G-G	12g-14 x 1	T27	10.6mm	3.7mm	5mm	100
7RTCS D12I-G	12g-14 x 1 1/2	T27	10.6mm	3.7mm	5mm	100
7RTCS D12J-G	12g-14 x 2	T27	10.6mm	3.7mm	5mm	100

Customer Service 1800 255 349 | techadvice@allfasteners.com.au | www.allfasteners.com.au

Allfasteners® 78-84 Logistics Street Keilor Park VIC 3042 Australia +61 3 9330 0555 Allfasteners Pty Ltd. ACN 113 948 100 ABN 86 766 075 300
Copyright © 2021. The contents of this document remains the property of Allfasteners® and may not be reproduced without prior written permission.