




DIAMOND GUARD 500 CARPET PROTECTION FILM

1000MM X 200M ROLL

SKU: 11H-DG5001020

Diamond Guard 500 is a self wound, **polyethylene film** coated with a pressure sensitive adhesive that has been designed to be applied to carpet and textile floor coverings. Its application is intended to provide a protective barrier and help prevent soiling and staining during construction processes. Diamond Guard 500 is slip resistant and allows for accurate marking out for partitioning etc. Diamond Guard 500 is an effective means of protecting carpets during renovation works or even at display homes.

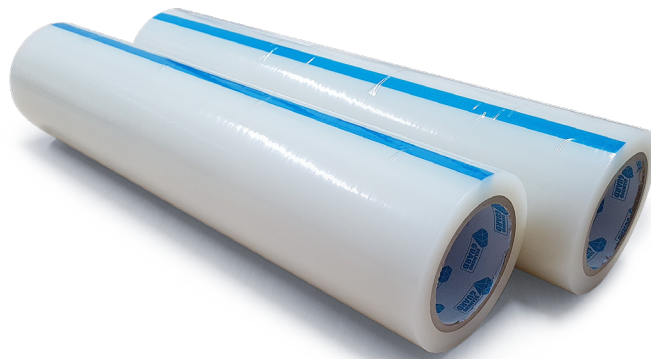

BENEFITS


- Easy roll out.
- Will not creep and wrinkle after application. Stays where it is put!
- Totally waterproof.
- Protects against damage caused by spillages of paints, adhesives etc.
- Easily removed.
- Can be left for up to 4 weeks.
- Adheres to most common carpet types.
- Safer than dust sheets, no trip risk.

APPLICATION INSTRUCTIONS

- This product is for application to carpets, DO NOT use on hard surfaces.
- Obviously, adhesion will be reduced on dusty surfaces. Vacuuming prior to use is recommended.
- Diamond Guard 500 must be removed after a maximum of 4 weeks.
- Always check Diamond Guard 500 is stuck firmly to carpets before commencing work.
- Diamond Guard 500 may not adhere to some carpets treated with "stain-guard" products as they can repel the adhesive.
- A test area is always recommended prior to full application.
- Do not use underfloor heating whilst Diamond Guard 500 is in place.
- It is the users responsibility to determine suitability for use. If in doubt contact technical services for advice.

SPECIFICATIONS

Specifications	Item
Construction	Consists of low density polyethylene film with an acrylic based pressure sensitive adhesive on one side
Colour	Transparent
Film Thickness	0.110mm
Adhesion	700g/25mm
Roll Size	1000mm x 200m
Application Conditions	The surface must be free from oil, dust, solvents and separating agents. Room temperature (10°- 40°)
Resistance	Against Moisture: Good, Against Oil: Moderate, Against Solvents: Moderate UV - Resistance: Indoor application only
Storage Conditions	Room temperature. Storage time max. 6 months from date of manufacture.

SKU	Item		
11H-DG5001020	Diamond Guard 500 Protective Film	1	1

DIAMOND GUARD 500 CARPET PROTECTION FILM

PROTECTION FILM APPLICATOR

SKU: 11H-DG2000APP

Diamond Guard 500 Dispenser is a very fast and efficient way to apply protection film to large areas of carpet.

BENEFITS

- Allows one operator to use larger rolls
- Ensures even application without stretching the film
- Quick and easy set up
- Enables fast and efficient application



APPLICATION INSTRUCTIONS

- Ensure all fixings are tight and installed correctly
- Ensure core plugs have been inserted into the Diamond Guard 500
- Protection film is applied in forward motion, ensure film runs underneath the bottom steel roller



SPECIFICATIONS

Specifications	Item
Colour	Grey
Construction	Steel
Size	50mm x 1200mm x 1200mm

SKU	Item		
11H-DG2000APP	Diamond Guard 500 Dispenser	1	1

The technical data contained herein is based on our present knowledge and experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technical changes or research between the date of issue of this document and the date the product is acquired. Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Any warranty applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.

Customer Service 1800 255 349 | techadvice@allfasteners.com.au | www.allfasteners.com.au

Allfasteners® 78-84 Logistics Street Keilor Park VIC 3042 Australia +61 3 9330 0555 Allfasteners Pty Ltd. ACN 113 948 100 ABN 86 766 075 300
 Copyright © 2021. The contents of this document remains the property of Allfasteners® and may not be reproduced without prior written permission.