
## **ROUND U-BOLTS**

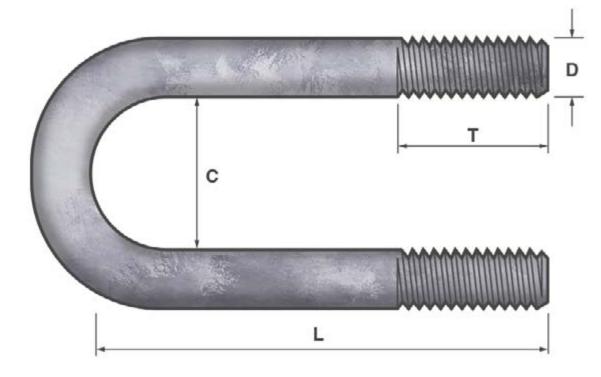

**Rod dimension:**  $(D^{(1)}) = x (L^{(2)}) = x (T) = x (C) = x (C)$ 

## Please Note:

Please contact us if you have any further requirements.

Material Grade: 4.8 Mild-Steel 8.8 High-Tensile Steel Stainless Steel

Finish: Galvanised Plain Other

Allfasteners® Pty Ltd Melbourne VIC 3042 Australia +61 3 9330 0555 ACN 113 948 100 ABN 86 766 075 300 Copyright © 2024 The contents of this document remains the property of Allfasteners® and may not be reproduced without prior written permission.

	CUSTOMER:		
	CONTACT NO.:		
	PROJECT:		
	DRAWING REF NO.:		
	DATE:	SCALE: Not to scale.	
	COMPONENTS LIST:		
	ITEM: GRAI	DE:	QTY:
	NOTES:		
	Note minimum order quantities apply. Nominal quantity of 20 pcs depending on sizing.		
MANUFACTURER:			
	ALLFASTENERS A		

<sup>&</sup>lt;sup>(1</sup> Current diameter range includes M10 - M30

<sup>&</sup>lt;sup>(2</sup> General rule L cannot be less than C. Limits for C are; M10 to M16 rod = 2 x D, M20 to M30 rod = 3 x D