

1800 255 349 | [techadvice@allfasteners.com.au](mailto:techadvice@allfasteners.com.au)

## MSU Torx Masonry Screws Galvanised

The unique undercut head design and a torx drive recess for positive installation performance is ideal for securing metal fixtures against hard surfaces by pulling flat against the surface.

If you need a screw for **masonry** that features a tamper-resistant head for added security, look to torx masonry screws – also known as **MSU torx masonry screws**.

- Driver: [T30 Torx bit](#)
- Galvanised



### Why MSU Torx Masonry Screws?

The torx masonry screw offers quick and effective light duty anchoring solution for fixing into multiple materials such as concrete, brick, stone, concrete block and wood. The hi-lo thread configuration taps its own thread within a pre-drilled hole in the substrate material allowing for adjustment and accurate installation. Ideal for window, door, subsill frame installation against masonry and many other applications.

The undercut nibbed head of torx masonry screws also creates its own countersink hole as the torx fastener is driven in – this saves a lot of time. Just one predrilled hole, and drive the screw in. It is then immediately secured and countersunk for a clean finish.

### USE

- One screw for subsill and frame installation
- Timber battens to masonry
- Top-hat installation on masonry
- Metal brackets, plates, and hinges to masonry
- Door and window frame installation screw

### KEY FEATURES

- Flat countersunk head with five locking ribs for self-embedding in timber applications
- Shallow flat undercut head means you can also install in non-countersunk metal to masonry application
- Non-expanding anchor, close to edge fixing

1800 255 349 | [techadvice@allfasteners.com.au](mailto:techadvice@allfasteners.com.au)


- Hi-lo cutting threads achieve optimum insertion into all masonry types
- Suitable for concrete, solid brick, perforated brick, hollow blocks, natural stone
- Mechanical Galvanized Class 3 finish. Minimum 20uM thickness

## Ask About Our MSU Torx Masonry Screws

Enquiries about these products and their applications? Feel free to [get in touch with us](#). For the best quality torx Masonry screws—like this torx masonry screw—see Allfasteners, Australia's place for All Things Fixings. And take advantage of our market-leading [shipping](#) deals – for all of the nation.

## More Information

<b>Delivery</b>	SHIPS IN 1 - 2 DAYS
<b>Material Grade</b>	Carbon Steel
<b>Coating &amp; Plating</b>	Galvanised
<b>Head Type</b>	Countersunk
<b>Driver Type</b>	Torx Bits
<b>Diameter / Gauge</b>	7.50mm
<b>Thread Type</b>	Hi-Lo Thread
<b>For use with</b>	Brick, Concrete, Masonry Solid Block, Timber
<b>Setting Conditions</b>	Hammer Drilling, Close to Edge, Overhead, Removable, Through Fixture
<b>Use for</b>	Framing & Truss, Window & Door Framing

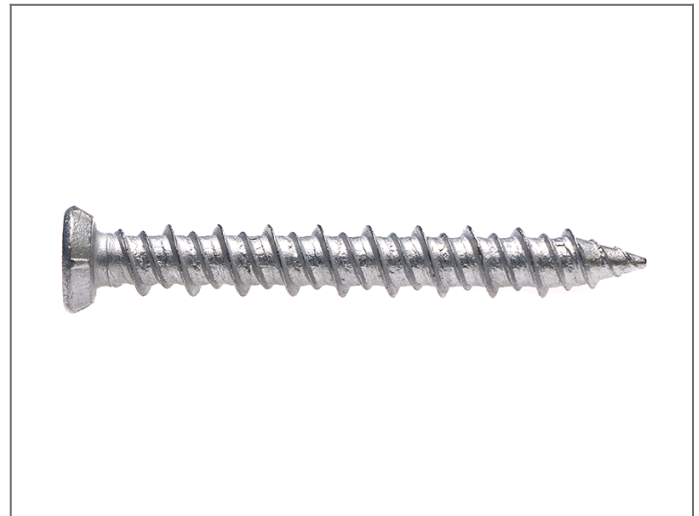

## Technical Information

SKU	Dia. x Length	Pre-Drill Dia.	Fixture Max.
1004.0750040	7.5 x 40mm MSU	6.0mm	5mm
1004.0750050	7.5 x 50mm MSU	6.0mm	15mm
1004.0750060	7.5 x 60mm MSU	6.0mm	25mm

1800 255 349 | [techadvice@allfasteners.com.au](mailto:techadvice@allfasteners.com.au)

SKU	Dia. x Length	Pre-Drill Dia.	Fixture Max.
1004.0750080	7.5 x 80mm MSU	6.0mm	30mm
1004.0750100	7.5 x 100mm MSU	6.0mm	50mm
1004.0750120	7.5 x 120mm MSU	6.0mm	70mm

## Documents

MSU Masonry Torx Screw TDS



For updates & pricing visit the website.  
[sales@allfasteners.com.au](mailto:sales@allfasteners.com.au)

