

1800 255 349 | techadvice@allfasteners.com.au

Hex Washer Head SD Screws CL4 Galvanised

Trade quality hex washer head galvanised screws offer a class 4 surface protection for external use. Providing a larger bearing surface our hex washer head self drillers, better distribute the load to the contact surface with the integrated washer head.

This is often the preferred option when applications such as roofing or cladding where increased contact is required to prevent damage to the material being fixing.

Also available with neo sealing washers in roofing application [click here](#).

A good general purpose metal-to-metal screw with high pull out strength and positive intallation under high torque.



INSTALLATION

- **Drill Capacity:** 8g (0.75-2.5mm), 10g (0.75-3.5mm), 12g (1-5mm), 14g-10 coarse thread (1.2-5mm), 14g-20 fine thread(1.2-6mm)
- **Driver Type:** 8g (1/4 Hex Socket), 10g, 12g (5/16 Hex Socket), 14g (3/8 Hex Socket)
- **Installation Speed:** 2,300-2,500 rpm max drill speed


PHYSICAL CHARACTERISTICS

- **Head Type:** Hex Washer Head
- **Point Type:** No.3 Self Drilling point
- **Material:** Carbon Steel
- **Finish:** Class 3/4 Mechanical Galvanised
- **Head Dia:** 8g (10.1mm), 10g (11mm), 12g (14.3mm), 14g (14.5mm)
- **Head Height:** 8g (4mm), 10g (4.6mm), 12g (5.3mm), 14g (6.3mm)

1800 255 349 | techadvice@allfasteners.com.au

More Information

Delivery	SHIPS IN 1 - 2 DAYS
Coating & Plating	Galvanised
Material Grade	Carbon Steel
Head Type	Hex Washer
Driver Type	Hex Sockets
Diameter / Gauge	8g, 10g, 12g, 14g
Point Type	Drill Point No.3
For use with	Sheet Metal, Steel
Application	Self Driller, Steel-to-Steel Self Drilling
Use for	Facade & Cladding, Framing & Truss, HVAC, Outdoor Structure, Roofing & Plumbing

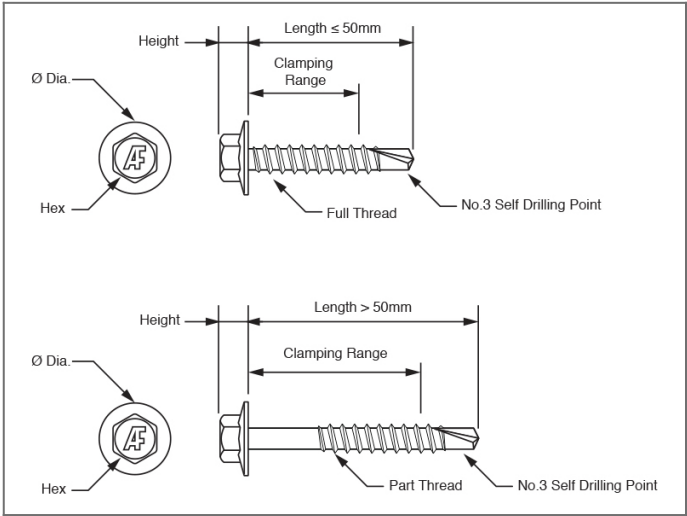

Technical Information

SKU	Gauge x Length	Coating	Driver Bit	Thread Length
1108.0080012	8-18 x 12mm	Class 3	1/4" Hex	Full
1111.0080020	8-18 x 20mm	Class 4	1/4" Hex	Full
1111.0100016	10-16 x 16mm	Class 4	5/16" Hex	Full

1800 255 349 | techadvice@allfasteners.com.au

SKU	Gauge x Length	Coating	Driver Bit	Thread Length
1111.0100025	10-16 x 25mm	Class 4	5/16" Hex	Full
1111.0120020	12-14 x 20mm	Class 4	5/16" Hex	Full
1111.0120025	12-14 x 25mm	Class 4	5/16" Hex	Full
1111.0120030	12-14 x 30mm	Class 4	5/16" Hex	Full
1111.0120035	12-14 x 35mm	Class 4	5/16" Hex	Full
1111.0120045	12-14 x 45mm	Class 4	5/16" Hex	Full
1111.0120055	12-14 x 55mm	Class 4	5/16" Hex	Part
1111.0120065	12-14 x 65mm	Class 4	5/16" Hex	Part
1111.0120075	12-14 x 75mm	Class 4	5/16" Hex	Part
1111.0140025	14-10 x 25mm	Class 4	3/8" Hex	Full
1112.0140025	14-20 x 25mm	Class 4	3/8" Hex	Full
1112.0140045	14-20 x 45mm	Class 4	3/8" Hex	Full
1111.0140050	14-10 x 50mm	Class 4	3/8" Hex	Full
1111.0140065	14-10 x 65mm	Class 4	3/8" Hex	Part
1111.0140075	14-10 x 75mm	Class 4	3/8" Hex	Part
1111.0140095	14-10 x 95mm	Class 4	3/8" Hex	Part
1111.0140135	14-14 x 135mm	Class 4	3/8" Hex	Part
1111.0140150	14-10 x 150mm	Class 4	3/8" Hex	Part

Documents

Hex Washer Self Driller TDS



For updates & pricing visit the website.
sales@allfasteners.com.au

