

1800 255 349 | techadvice@allfasteners.com.au

T17C-C Treated Pine Screws Torx Drive

We have come along way from the humble galvanised chipboard screws for treated pine construction. The type 17 (T17) screws have the ideal milled point and cutting threads needed to secure pine timbers with ease – no pre drilling required.

Experience a reliable self drilling screws for hardwoods and treated pine timber construction. Now with added corrosion protection from the chemicals found in treated pine – extend the life of your structure.



Timber screws for treated pine.

The only construction screw with a 6-lobe torx drive head for secure and reliable driving of screws. The type 17 serrated point eliminates the need for pilot holes, suitable to self drill most hardwoods and treated pine timbers.

KEY FEATURES:

- **Ruspert protective coating** extends the life of screws used in treated pine structures
- **Torx drive** has more contact with the driver bit and makes for efficient fixing with less wobble and cam out
- **Countersunk** ribbed head will embed every-time without the need to pre-countersink
- **T25 torx bit** supplied with every box to get you going

INSTALLATION

- **Drill Capacity:** For use in many types of timber including treated pine.
- **Driver Type:** T25 Torx Drive
- **Installation Speed:** 1500 RPM Max Drill Speed


PHYSICAL CHARACTERISTICS

- **Head Type:** Countersunk ribbed
- **Point Type:** Type 17 milled point

- **Material:** Carbon Steel
- **Finish:** Ruspert
- **Head Dia:** 8g (8.3mm), 10g (9.3mm)
- **Head Height:** 8g, 10g (6mm)

More Information

Delivery	SHIPS IN 1 - 2 DAYS
Coating & Plating	Ruspert
Material Grade	Carbon Steel
Head Type	Countersunk Ribbed
Driver Type	Torx Bits
Diameter / Gauge	8g, 10g, 12g
Point Type	Type 17 (T17) Miled Point
Thread Type	Coarse
For use with	Hardwood, Timber, Treated Pine
Use for	Decking, Framing & Truss, Outdoor Structure

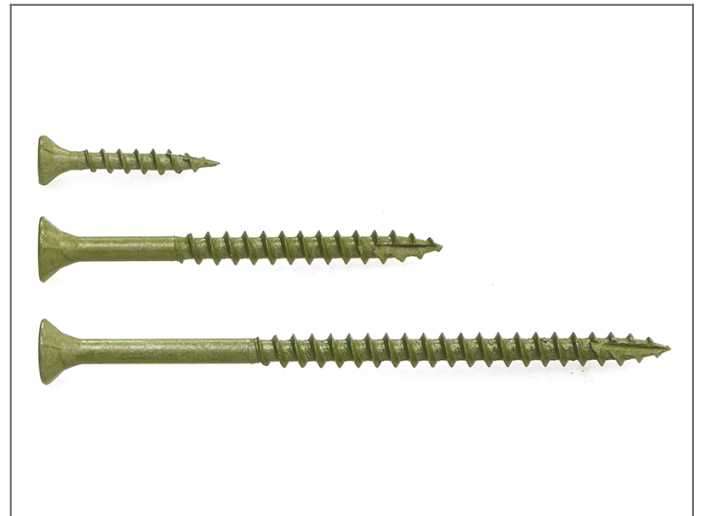

Technical Information

SKU	Item	Driver	Min. Embedment	Item
1200.0080025	8-9 x 25mm	T25	20mm	8-9 x 25mm T17C-C
1200.0080030	8-9 x 30mm	T25	20mm	8-9 x 30mm T17C-C
1200.0080035	8-9 x 35mm	T25	20mm	8-9 x 35mm T17C-C

1800 255 349 | techadvice@allfasteners.com.au

SKU	Item	Driver	Min. Embedment	Item
1200.0080040	8-9 x 40mm	T25	25mm	8-9 x 40mm T17C-C
1200.0080045	8-9 x 45mm	T25	25mm	8-9 x 45mm T17C-C
1200.0080050	8-9 x 50mm	T25	25mm	8-9 x 50mm T17C-C
1200.0080057	8-9 x 57mm	T25	25mm	8-9 x 57mm T17C-C
1200.0080065	8-9 x 65mm	T25	35mm	8-9 x 65mm T17C-C
1200.0100040	10-9 x 40mm	T25	25mm	10-9 x 40mm T17C-C
1200.0100050	10-9 x 50mm	T25	25mm	10-9 x 50mm T17C-C
1200.0100065	10-9 x 65mm	T25	35mm	10-9 x 65mm T17C-C
1200.0100075	10-9 x 75mm	T25	35mm	10-9 x 75mm T17C-C
1200.0100100	10-9 x 100mm	T25	35mm	10-9 x 100mm T17C-C
1200.0100125	10-9 x 125mm	T25	50mm	10-9 x 125mm T17C-C
1200.0100150	10-9 x 150mm	T25	50mm	10-9 x 150mm T17C-C
1200.0120065	12-8 x 65mm	T25	35mm	12-8 x 65mm T17C-C
1200.0120075	12-8 x 75mm	T25	35mm	12-8 x 75mm T17C-C
1200.0120100	12-8 x 100mm	T25	35mm	12-8 x 100mm T17C-C

Documents



For updates & pricing visit the website.
sales@allfasteners.com.au

